


Standard blind rivets - Black lacquered

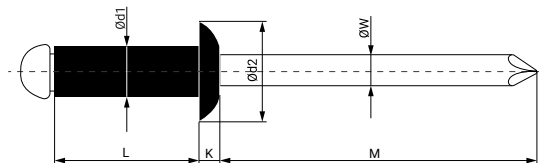

The lacquered rivet is a permanent fastening item used to join two elements of the same or different material when there is only access from one side.

It is a very versatile model that is used when the union of the two elements does not require a specific tightening and we need an adaptation of the colour.

It allows a quick, economical and high quality assembly.

To make a correct choice of the size of rivet to be used, it is necessary to know beforehand the dimension of the hole of the application and the thickness foreseen for riveting.

MATERIAL: Aluminium body Al Mg 3.5
Steel stem A1K

FINISH: Housing black lacquered
RAL 9005
Zinc-plated stem Cr3

Measure Ø d1 x L	Part Number	Ø d1 +0,08 -0,15	L +1,0 - 0,2	Ø d2	M Min.	K ±0,2	Ø W ±0,15	Ø Hole	Box Quantity	Outer Box Quantity
3,2 x 6	79101045	3,2	6	6,4 ± 0,2	27	1,0	1,80	3,30	500	8.000
3,2 x 8	79101053	3,2	8	6,4 ± 0,2	27	1,0	1,80	3,30	1.000	8.000
3,2 x 10	79101061	3,2	10	6,4 ± 0,2	27	1,0	1,80	3,30	500	8.000
3,2 x 12	79101520	3,2	12	6,4 ± 0,2	27	1,0	1,80	3,30	500	8.000
4,0 x 6	79101109	4,0	6	8,0 ± 0,2	27	1,4	2,20	4,10	500	4.000
4,0 x 8	79101125	4,0	8	8,0 ± 0,2	27	1,4	2,20	4,10	500	8.000
4,0 x 10	79101467	4,0	10	8,0 ± 0,2	27	1,4	2,20	4,10	500	4.000
4,0 x 12	79101141	4,0	12	8,0 ± 0,2	27	1,4	2,20	4,10	500	8.000
4,0 x 14	79101731	4,0	14	8,0 ± 0,2	27	1,4	2,20	4,10	500	8.000
4,0 x 16	79101740	4,0	16	8,0 ± 0,2	27	1,4	2,20	4,10	500	4.000
4,0 x 18	79101168	4,0	18	8,0 ± 0,2	27	1,4	2,20	4,10	500	2.000
4,0 x 20	79101758	4,0	20	8,0 ± 0,2	27	1,4	2,20	4,10	500	4.000
4,8 x 8	79101221	4,8	8	9,5 ± 0,3	27	1,5	2,65	4,90	500	4.000
4,8 x 10	79101230	4,8	10	9,5 ± 0,3	27	1,5	2,65	4,90	500	4.000
4,8 x 12	79101248	4,8	12	9,5 ± 0,3	27	1,5	2,65	4,90	500	8.000
4,8 x 14	79101504	4,8	14	9,5 ± 0,3	27	1,5	2,65	4,90	250	4.000
4,8 x 16	79101512	4,8	16	9,5 ± 0,3	27	1,5	2,65	4,90	250	4.000
4,8 x 18	79101531	4,8	18	9,5 ± 0,3	27	1,5	2,65	4,90	250	2.000
4,8 x 21	79100122	4,8	21	9,5 ± 0,3	27	1,5	2,65	4,90	250	2.000