


aluMito

PRO 300 RANGE

- Aluminium medium-sized scaffold tower.
- Suitable for indoor industrial works and wherever you need to reach medium working heights.
- Galvanized steel base
- Stiles size: 25x65 mm
- Square rungs: 30x30 mm
- 4 Ø 125 mm castors with brakes
- Working platform with trapdoor made of wood and aluminium



**FROM STANDARD TO
MAXI COMPOSITION**

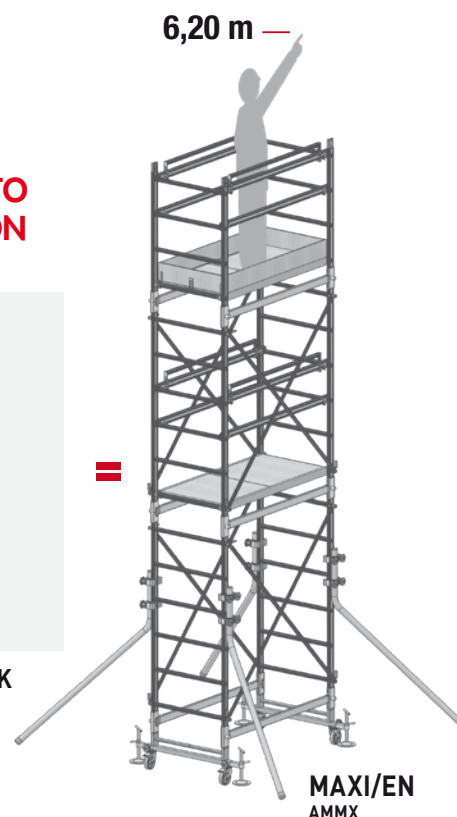

ACCESSORIES



Stabilisers

Code D661

4 pieces with 8 clamps
kg: 6,8 (4 pcs.) vol: 0,016 m³
Packages: 2
EAN 8028406090090



1800 Extension pack (6 rungs)

Code AMMP

kg: 17,40 vol: 0,02 m³
Packages: 2
EAN 8028406004127



Levellers

Code AMLV-4


Packages: 1 (4 pcs)
kg: 11,2 vol: 0,0045 m³
EAN 8028406105619



Toe board

Code AMFP


for working platform
kg: 8 vol: 0,02 m³, Packages: 1
EAN 8028406090090



Working platform with trapdoor

Code AMPB

Wood/aluminium
kg: 11 vol: 0,08 m³
EAN 8028406090120



Stairwell position devices

Code AMZP

including clamps
kg: 3 vol: 0,01 m³, Packages: 2
EAN 8028406103540



Guardrail

Code AMRP

complying the norm 2 PFG 1273/11.10
kg: 7 vol: 0,02 m³, Packages: 1
EAN 8028406004066

	H	H	H	H	H		vol.		
Code	[cm]	[cm]	[cm]	[cm]	[cm]	[kg]	[m ³]	pieces	Ean
AMST	340	440	240	160	75	77	0,40	8	8028406090298
AMMX/EN	540	620	420	160	75	119	0,62	14	8028406122265
AMMP	180	-	-	160	75	17,4	0,22	2	8028406004127

BASE:
86x160 cm
STRUCTURE:
75x150 cm
PLATFORM:
68x150 cm



CLASS 3

200 kg/m²: EN 1004-1:2021



Standard
Maximum working
height 4,40 m



Maxi
Maximum working
height 6,20 m



EN1004-1:2021
EUROPEAN NORM

