


Zinc-plated DIN 5299 snap hook

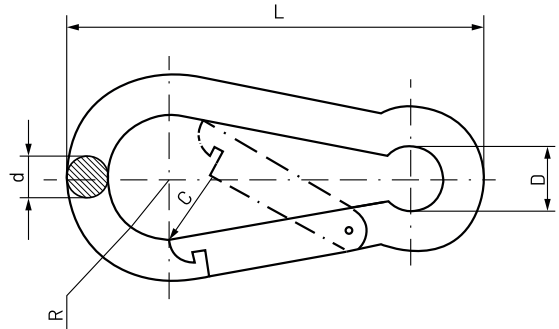

Thanks to its design, the hinge can be used in quick assemblies without risking this element to open, and in temporary uses that imply removing it frequently or in a hurry.

The perfect coupling of the hinge end with the apex of the body and the quality of the return device guarantee maximum safety and efficiency.

TIPS: In order not to compromise safety, the W.L.L established for each size must never be exceeded. The quality of the coating guarantees good corrosion resistance. Industrial use, wire and chain attachment (No PPE).

MATERIAL: Steel C15
FINISH: Zinc-plated

Part Number	Size d x L	Denomination	L	d	D	C	2R	Workload W.L.L (kg)	Box Quantity	Outer Box Quantity
09532909	4 x 40	D5299C 104	40	4	7	7	14	70	100	2000
09532915	5 x 50	D5299C 105	50	5	8	7	15.5	100	100	1000
09532923	6 x 60	D5299C 106	60	6	9	8	18	120	100	800
09532931	7 x 70	D5299C 107	70	7	10	8	20	180	100	400
09532940	8 x 80	D5299C 108	80	8	12	9	24	230	50	300
09532958	9 x 90	D5299C 109	90	9	12	10	25	250	25	250
09532966	10 x 100	D5299C 110	100	10	15	11	30	350	25	150
09532974	11 x 120	D5299C 111	120	11	18	16	36	400	10	100
09532982	12 x 140	D5299C 112	140	12	20	19	40	450	10	80
09532990	14 x 180	D5299C 114	180	14	22	35	60	580	10	40
09542002	15 x 200	D5299C 115	200	15	22	35	63	700	10	30

— These items are for industrial use: cable and chain connection (**They are not Personal Protective Equipment - PPE**) —