

"DUPLA"


- Aluminium double-sided treads stepladder.
- Stile/tread connection through triple expansion and crimping.



Aluminium die casting hinges



 **SAFETY:** 2 strong restraint straps – 3 cm wide

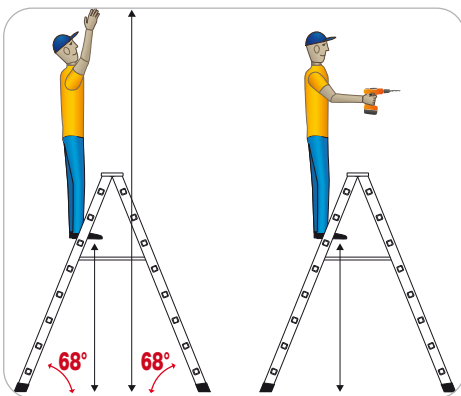

RIGHT WORKING POSITION



68° SLOPE ON BOTH SIDES

									
Code	treads number	(cm)	(cm)	(cm)	(cm)	(cm)	(kg)	(m ³)	Ean
D-2*	2 + platform	57	55	207	41,0	62	4,2	0,04	8028406102571
D-3	3 + platform	80	72	207	44,0	87	5,4	0,07	8028406002505
D-4	4 + platform	103	90	231	47,0	112	6,6	0,09	8028406002512
D-5	5 + platform	130	113	255	50,0	141	7,8	0,11	8028406002024
D-6	6 + platform	154	125	279	53,5	166	9,0	0,14	8028406002031
D-7	7 + platform	176	144	303	56,0	190	10,4	0,16	8028406002048
D-8	8 + platform	199	169	327	59,5	215	11,8	0,20	8028406002055
D-9	9 + platform	223	184	351	62,0	241	13,6	0,23	8028406002062
D-10	10 + platform	249	197	375	65,5	265	14,8	0,27	8028406002079
D-12	12 + platform	297	220	421	72,0	315	17,8	0,35	8028406002086



This product is delivered with a PVC wrap film and product leaflet

*D-2 doesn't comply with the part 3 of the EN131

150 kg MAX



EN131 EUROPEAN NORM



UPDATE NEW NORM EN131: 01/18

85 mm



85 mm non-slip treads on both sides



Practical tool hook on side

15,5 cm

Anti-slip high shoes with anti finger-crushing system



SUITABLE FOR PROFESSIONAL USE



Loading test 1.500 Newton/1 min.
Dynamic test of 50.000 cycles

PROFESSIONAL STEPLADDER